
Lobby overview


New finishes and furniture on the newly supplied reference model.

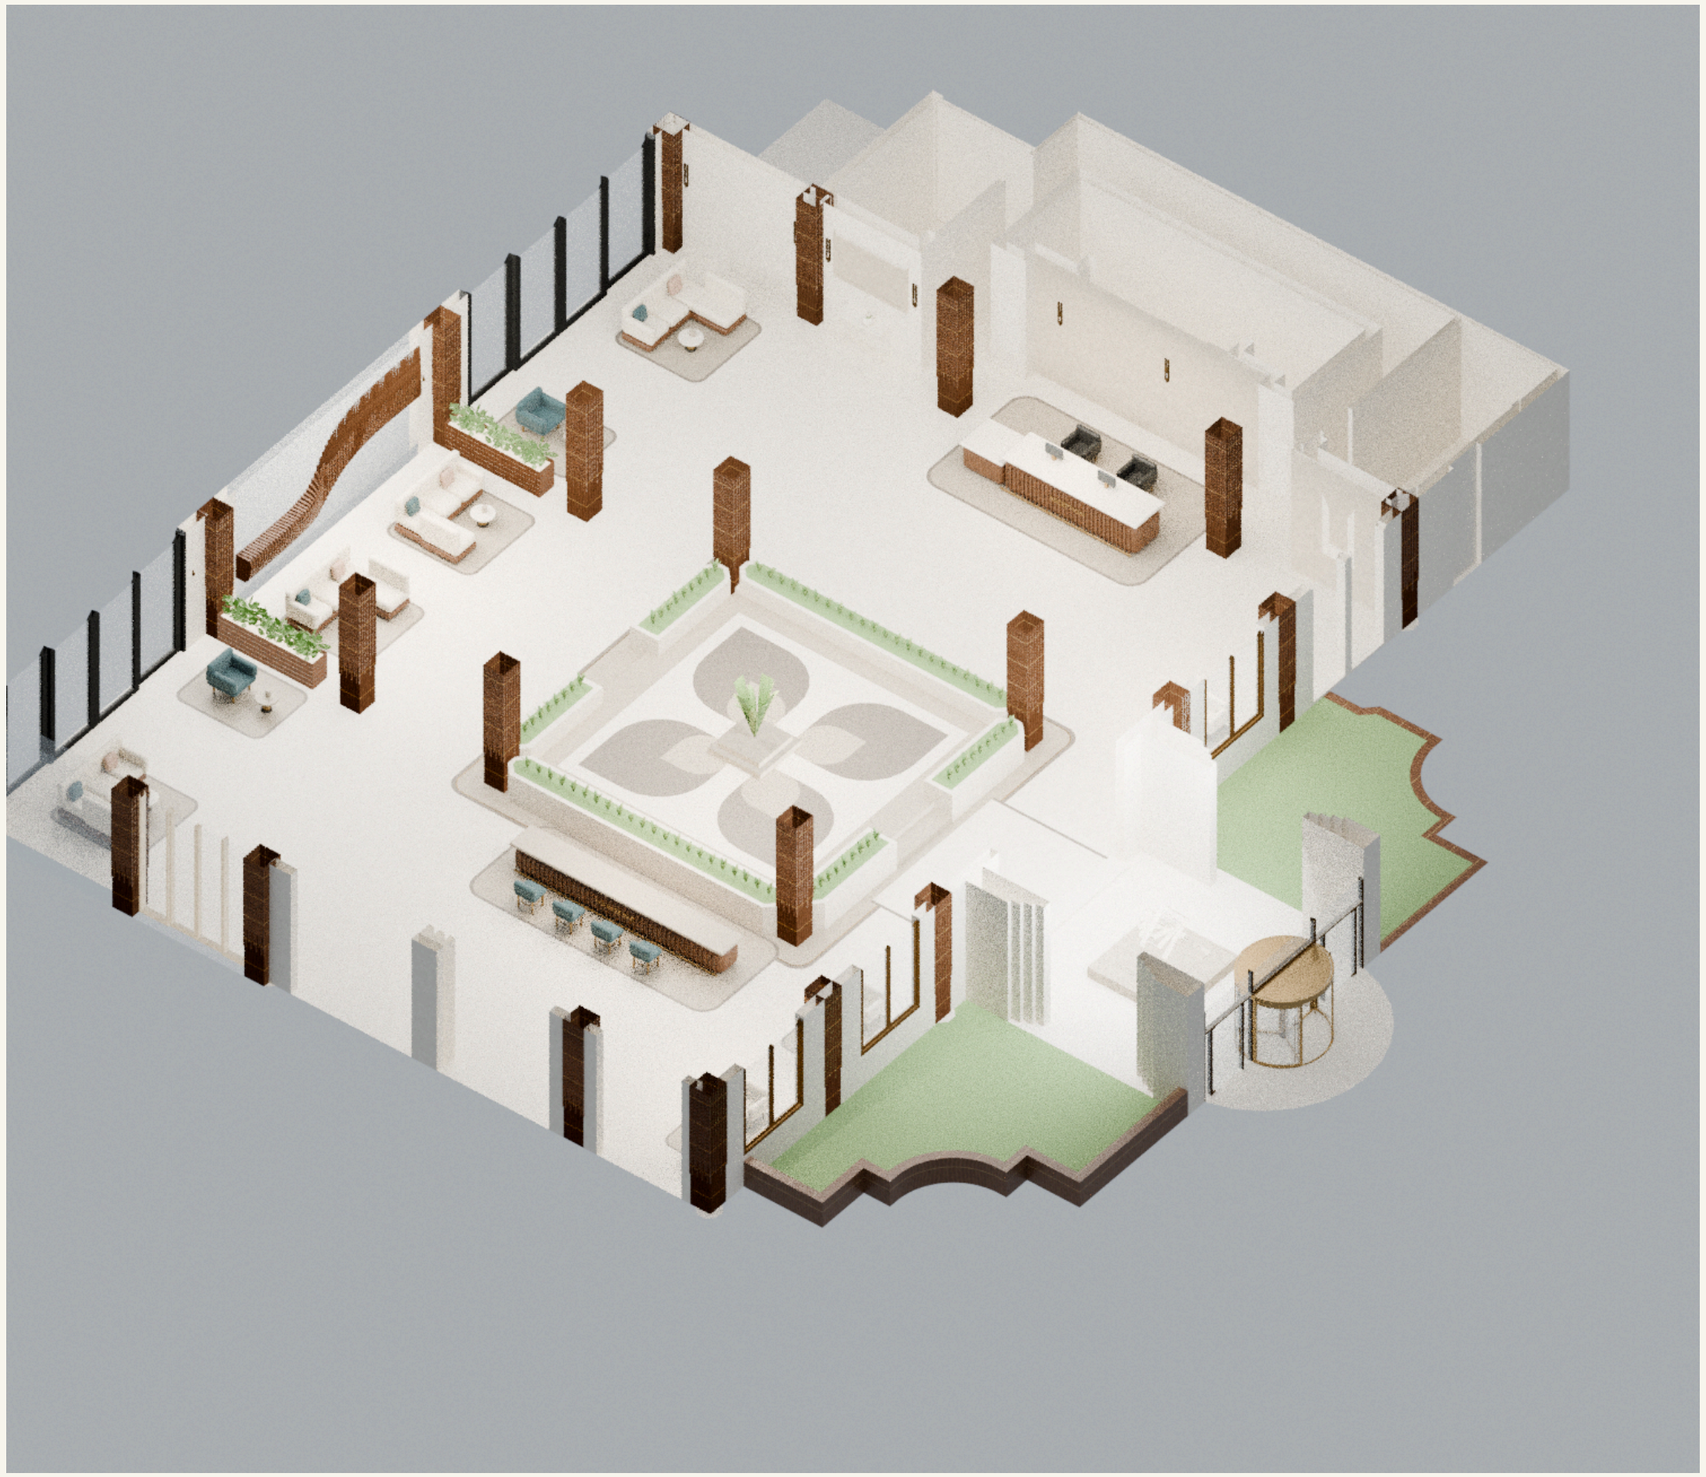

Original building, centrepiece and steps retained | 1

Furniture and floor plan

Orientation matches the supplied top view: entrance at top; reception left; low bar right of the centrepiece.

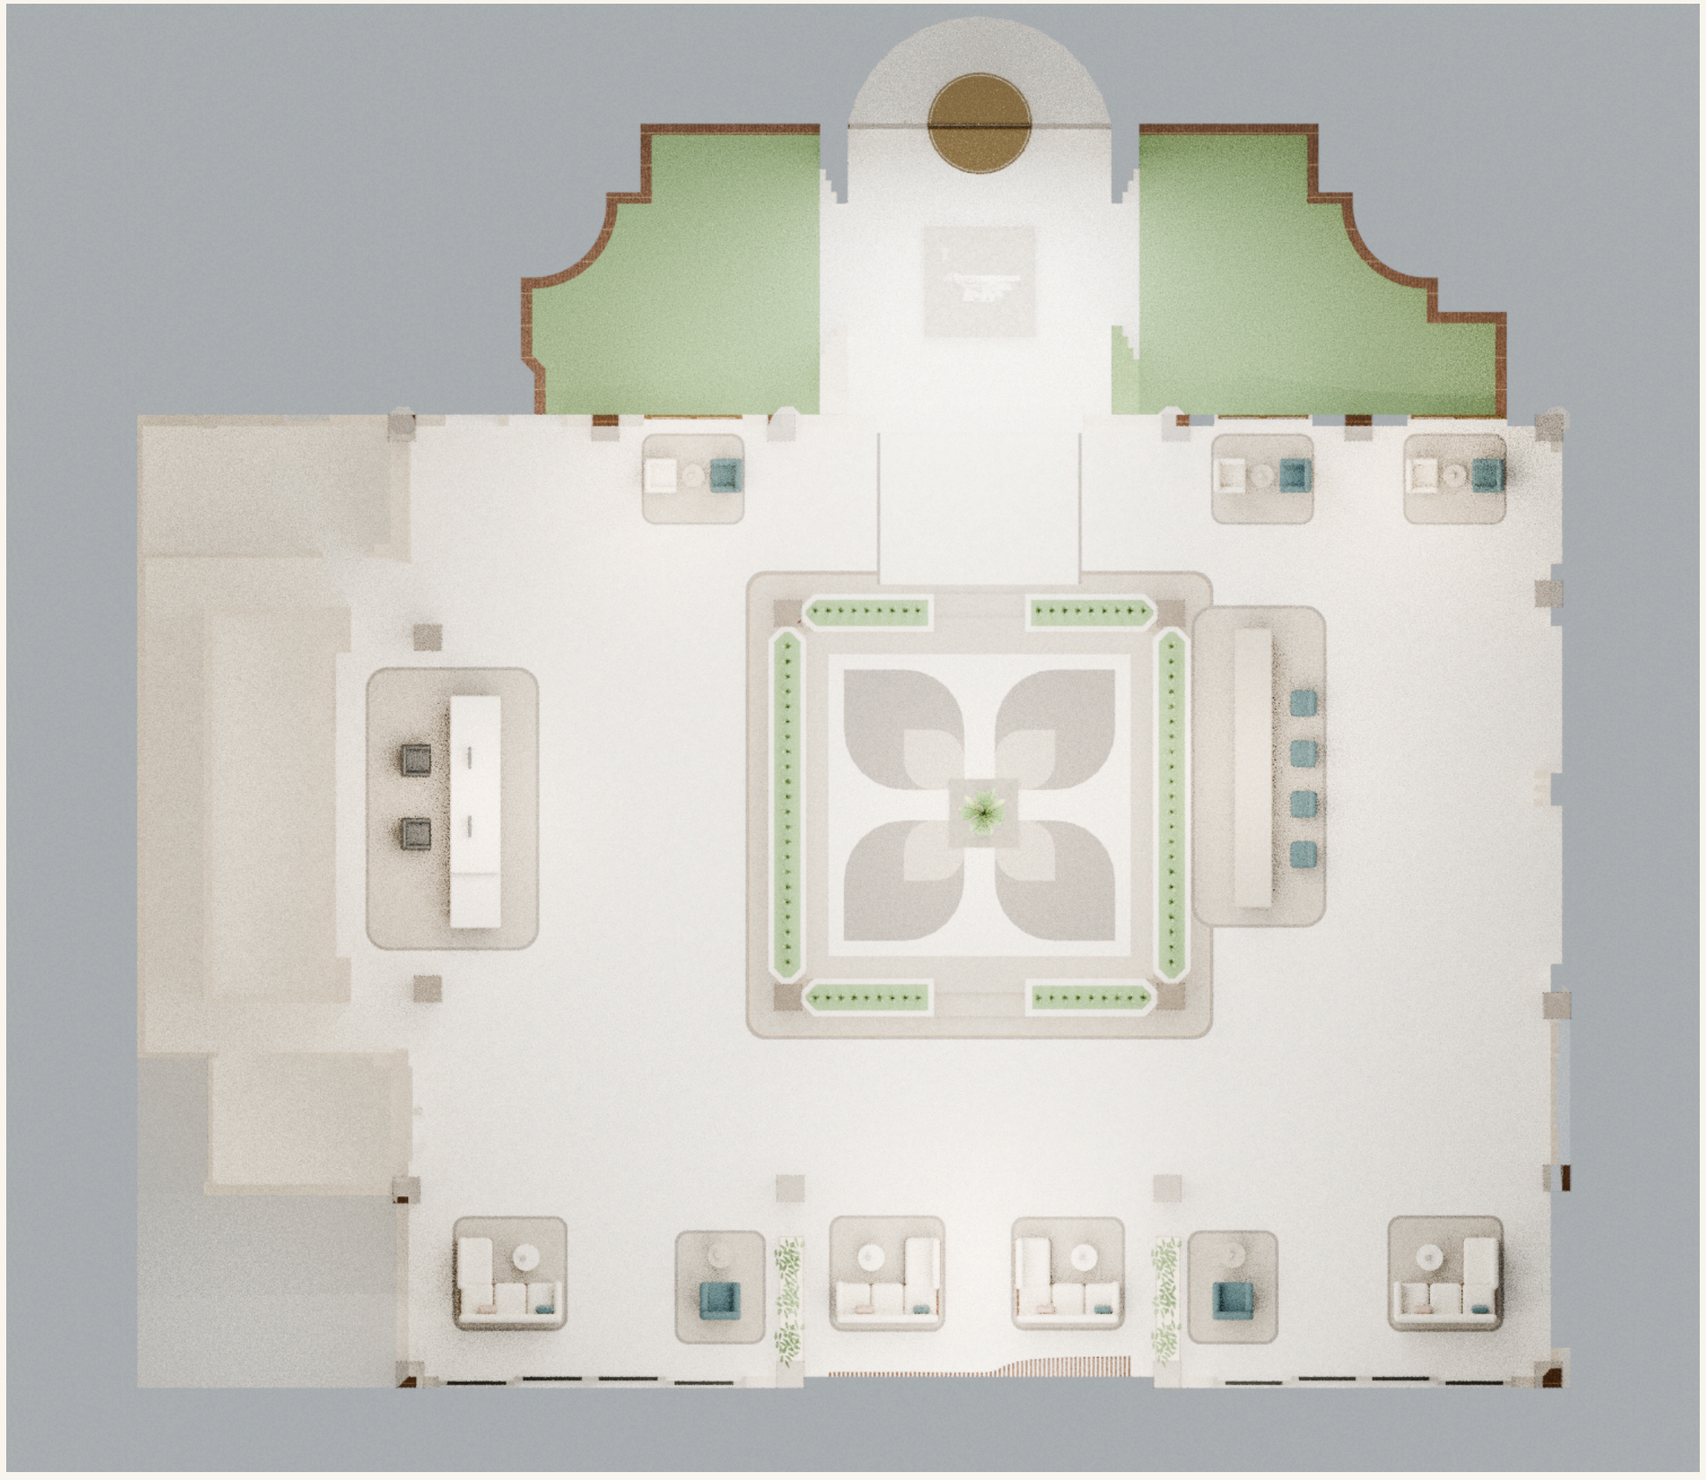

Original building, centrepiece and steps retained | 2

Original raised centrepiece

Original platform, two 170 mm steps and planter boundaries retained; materials and planting redesigned.



Original building, centrepiece and steps retained | 3

Reception in the reference zone

New rounded stone / walnut counter with a lowered service section. No high freestanding backdrop.



Low lounge bar

Bar top 0.80 m above the main floor, below the adjoining original planter lip. No high backbar unit.



Original building, centrepiece and steps retained | 5

Materials and layout checks

Warm ivory, greige, taupe, walnut, champagne and petrol upholstery.


Ivory porcelain




Warm greige stone



Taupe borders

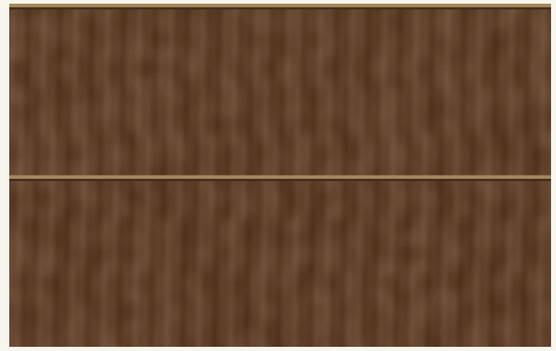

Column finish / horizontal joints

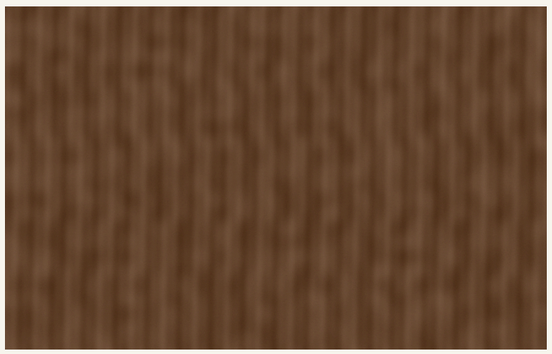

Walnut joinery



Champagne metal



Ivory upholstery



Petrol upholstery

3,934 reference meshes checked: no changed coordinates or face counts.

29 furniture groups checked: no collisions, floor overhangs or obstructions in 11 opening zones.

Original centre levels: 0.22 / 0.39 / 0.56 m. Original entrance step: 0.22 to 0.3065 m.

All 28 new floor fields face upward; texture references and UV coordinates verified.

DAE is provided for SketchUp import. SketchUp Desktop was unavailable for testing.

Source self-shadow artifacts are suppressed for presentation only; full source geometry is retained.